



Agitators

A G I T A T O R / M I X E R A S S E M B L Y

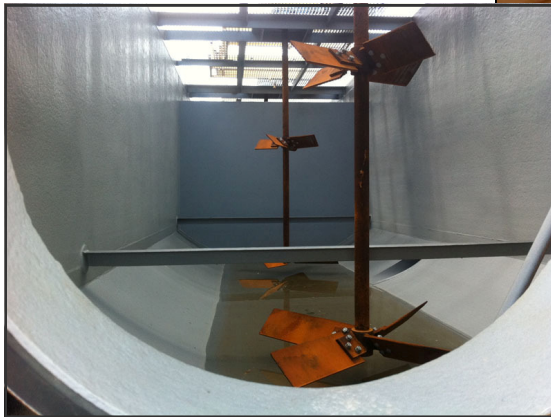

1-800-GO-TANKS
www.deltank.com

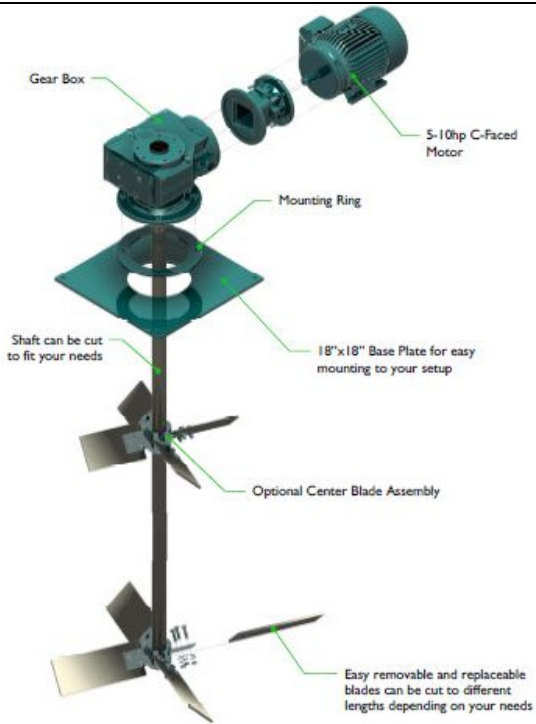

HOLLOW BORE GEARBOX DESIGN WITH C-FACE MOTORS, ELIMINATING COUPLING ALIGNMENT PROBLEMS AND DOWNTIME

Agitators

S P E C S & I N F O R M A T I O N

Specifications

Hollow bore gearbox (no output coupling)
72 rpm output mixer (no input or shaft coupling),
2 3/8" OD blade diameter

Power Requirements

3 Phase 480 V, 60 Hz

Motors, Gearboxes

(1) WEG 10 hp Expl. Proof, 1800 rpm, C-faced (1)

Amps

14

Fluids Maximum

20#/gal

Expl. Proof Starters

Square D Manual Size 1

Oil Required

2.11 gallons
Mobilgear 630 0+-40C

T h e A G I T A T O R S can be configured to meet your projects specific needs. Please call DEL TANK & FILTRATION SYSTEMS @ 1-800-GOTANKS and speak with one of our customer representatives for more detailed information about the TOTAL CLEAN SYSTEM and how it can work for you

1-800-GO-TANKS
www.deltank.com

